

# DLU-25/30/40 TOUCH II LOW SPIN WASHER EXTRACTORS



## TOUCH II

User friendly and totally programmable 7" Touch II  
USB Connection. PC software free of charge for  
programming, traceability, data analysis...  
Videos on display (ads, instructions, etc.)  
37 languages  
8 dosing signals as standard



## G FACTOR

High G-Factor:  
G-FACTOR 200 for low spin washers



## EFFICIENCY

Intelligent consumption  
Optimal loading  
Water Recovery tanks ready: ECOTANK  
Low water consumption



## VERSATILITY

Make to order: customization  
OPL < > COIN  
Electric < > Hot water  
Drain valve < > Pump  
Wet cleaning features



## CONNECTIVITY

Remote technical service  
Management of laundries: OPL and COIN  
Remote payment



## ERGONOMICS

Biggest door diameters: Ø 14" (for DLU-25/30) and Ø  
18" (for DLU-40)  
Easy opening/closing system for door lock



## MAINTENANCE

Hinged panel: easy access to parts  
Equivalent parts for all models: contactors,  
electronic devices, gear  
Technical menu: traceability, error diagnosis



## OTHERS


Grey skinplate body  
Drum and tub in stainless steel AISI 304  
Detergent dispenser with 4 compartments  
Electronic control of imbalance with frequency  
control  
LOADING AID feature: water and rotation control.  
CE and WRAS approved product. Option ETL



## OPTIONS

- Double drain
- External double drain 3" (recommended for DLS-25/30)
- Normally closed valve
- Water RE-CYCLE: recirculation of bath water
- Relay card with 6 extra dosing signals: up to 14 signals
- Printer
- DomusConnect communication
- Silicone gasket
- Reversible door opening
- Steam kit to transform an E or HW heated machine into steam version
- Stainless steel AISI 304 outer casing
- Stainless steel AISI 304 front panel
- SLUICE: model with 8mm drum holes
- Anchoring base
- Maritime voltage for electric models: 440V III 50/60 Hz  
No neutral
- Coin / token kit
- Delayed door opening in case of power outage

TECHNICAL DATA	UNIT.	DLU - 25 TOUCH II	DLU - 30 TOUCH II	DLU - 40 TOUCH II			
<b>DRUM</b>							
Load capacity	lb	25	30	40			
Volume	CU.FT	3.5	4.5	6			
Diameter	in	3.5	4.5	6			
Depth	in	13	16.92	18.50			
<b>GENERAL DETAILS</b>							
Washing speed/ Spinning speed	r.p.m.	53/759	53/759	50/714			
Factor G	-	200	200	200			
Maximum force transmitted	KN	2,0 ±3	2,31 ±4	2,63 ±5			
Frequency-dynamic force	Hz	8,93	8,93	8,42			
Noise level	dB	<70	<70	<70			
Coin laundry version	-	Yes	Yes	Yes			
Double drain	-	Opt (external)	Opt (external)	Opt			
Weighing system / Tilting system	-	No/No	No/No	No/No			
SLUICE - Option 8mm holes drum	-	Yes	Yes	Yes			
<b>DOOR</b>							
Height center door/ Height door	in	22.44/12.20	22.44/12.20	25.78/13.70			
Diameter	in	14.68	14.68	18.11			
<b>POWER</b>							
Motor	Hp	1,48	1,48	2,9			
Electric heating power	kW	6	9	12			
Total electric power (electric model)	kW	6,25	9,5	12,75			
Total electric power (hw, steammodel)	kW	1,1	1,1	2,15			
<b>CONNECTIONS</b>		<b>ELECTRICAL</b>	<b>STEAM / HOT WATER</b>	<b>ELECTRICAL</b>	<b>STEAM / HOT WATER</b>	<b>ELECTRICAL</b>	<b>STEAM / HOT WATER</b>
Tensión 230V- I + N + T	Nº x mm2 / A	3 x 4 / 32A	3 x 1,5 / 6A	3 x 10 / 50A	3 x 1,5 / 10A	3 x 16 / 63A	3 x 1,5 / 10A
Tensión 230V- III + T	Nº x mm2 / A	3 x 2,5 / 20A	-	3 x 4 / 25A	-	3 x 6 / 40A	-
Tensión 400V- III + N + T	Nº x mm2 / A	3 x 1,5 / 10A	-	3 x 1,5 / 16A	-	3 x 2,5 / 20A	-
Steam inlet (Steam model)	inch	1/2"		1/2"		1/2"	
Maximum steam consumption (Steam model)	lbs/h	15.5		18.8		26.5	
Water inlet	inch	3/4"		3/4"		3/4"	
Water main pressure	Kg/cm <sup>2</sup>	2-4		2-4		2-4	
Maximum water consumption*	Gal/h	15.80		21		31.35	
Drain	inch	3"		3"		3"	
Drainage capacity	Gal/min	52.8		52.8		52.8	
<b>DIMENSIONS / PACKING DIMENSIONS</b>							
Net Width / Gross Width	in	28.3/31.5		28.3/31.5		31/33	
Net Depth / Gross Depth	in	26.4/39		32.67/39		33/39.76	
Net Height / Gross Height	in	45.59/53.14		45.59/53.14		51.45/59	
Net weight / Gross weight	lbs	478/496		526/545		620/664	
Volume	ft3	37.8		37.8		46	

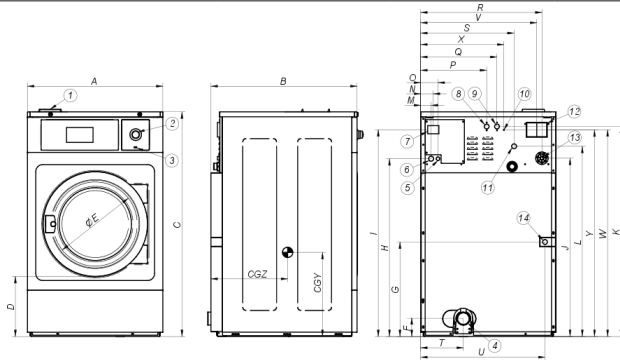

- 1 SOAP DISPENSER
- 2 EMERGENCY STOP
- 3 USB PORT
- 4 DRAIN
- 5 ELECTRIC CONNECTION TO LIQUID SOAP PUMPS
- 6 ELECTRICAL CONNECTION
- 7 MAIN SWITCH
- 8 AUXILIAR WATER INLET
- 9 HOT WATER INLET
- 10 EQUIPOTENTIAL CONNECTION
- 11 COLD WATER INLET
- 12 BLUR OUTPUT / WATER OVERLOAD
- 13 LIQUID SOAP CONNECTION
- 14 STEAM CONNECTION

\* N°20 Program, 75% load

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	CGY	CGZ
DLU-25	28.31	26.93	45.59	12.20	14.69	5.67	17.32	34.88	41.50	35.00	42.24	37.72	2.40	2.91	3.98	12.44	14.80	25.08	18.70	8.31	25.75	23.90	42.24	16.69	44.02	15.08	20.12
DLU-30	28.31	32.68	45.59	12.20	14.69	5.67	17.32	34.88	41.50	35.00	42.24	37.72	2.40	2.91	3.98	12.44	14.80	25.08	18.70	8.31	25.75	23.90	42.24	16.69	44.02	15.08	20.12
DLU-40	31.02	33.07	51.46	13.70	18.11	4.25	21.73	40.75	47.36	40.87	48.11	43.58	2.40	2.91	3.98	15.16	17.52	27.80	21.42	9.80	28.50	26.61	47.36	19.09	47.32	18.86	21.50