



TOUCH II

- 7" touchscreen – intuitive and completely programmable
- USB Connection: software free of charge
- 37 languages, continually expanding
- Upload videos to display, use for ads, instructions, etc.



G-FORCE EXTRACTION

- 25-40 lb capacity washers: 500G
- 50-180 lb capacity washers: 450G
- 230C-275C lb capacity washers: 350G
- High G-Force speeds up drying process, reducing energy costs and increasing throughput and productivity



CONNECTIVITY

- DomusConnect, standard
- Provided at NO extra charge
- Manage your laundry operations from anywhere, 24/7
- Remote diagnosis and technical service
- Create programs, special promotions, access real-time reports, have service alerts go directly to technicians, and more



EFFICIENCY

- Low energy and water consumption
- Intelligent consumption



VERSATILITY

- Soft Mount for easy installation
- Easily converts from OPL to COIN
- Electric heating <> Hot water
- Drain valve <> Pump (Pump only available in 25lb and 30lb models)
- Wetcleaning ready
- Extraction speed and water levels easily programmed for wetcleaning, firehouse, etc.
- Machines can be customized, made to order



ERGONOMICS

- Reversible doors, standard – industry exclusive
- Industry leading large doors for easy loading and unloading
- Metal door handle, commercial grade
- Door pin guide to prevent door miss locking



MAINTENANCE

- Hinged front control panel – easy and ergonomic access
- Complete technical menu
- Common parts across all models



MORE INFO

- Stainless steel front and top panels
- 3 water inlets
- Drum and tub in stainless steel AISI 304
- Detergent dispenser with 4 compartments
- Electronic control of imbalance with frequency control (inverter driven washer with imbalance recognition)
- Loading Aid system: water and rotation control
- SGS & CE approved



OPTIONS


- Auto unlock kit for door (in case of power failure) – recommended for vended laundries
- Silicon gasket
- Relay card with 6 extra dosing signals: up to 14 signals
- 5 Extra dosing pumps
- Dosing pump kit available
- Normally closed drain valve
- Double drain kit
- Drain pump (Only 25lb and 30lb models)
- Leveling feet
- Automatic weighing sensor system on feet (Includes kit with 6 extra dosing signals).
- Various Plinths for leveling machines from top, aligning door base, etc.
- Sluice – Drum
- Tropicalized model: protected board
- Steam kit available
- Maritime (oil rigs) electric models available
- Coin/token kit

DHU-100 TOUCH II

High Spin Washer

DRUM			
Load capacity	lbs	100	
Volume	cu. ft.	15.9	
Diameter	in	33.8	
Depth	in	28.3	
GENERAL DETAILS			
Washing speed / spinning speed	r.p.m.	42.5 / 966	
G Factor	-	450	
Coin laundry version	-	No	
Double drain	-	Opt	
Weighing System /Tilting System	-	Opt / No	
DOOR			
Height center door / Height door	in	34.8 / 21.2	
Diameter	in	22	
POWER			
Motor Power Consumption	hp	8.05	
CONNECTIONS		Electric Heating	Hot Water/Steam
Voltage 208-240/60/1~ + G	FLA/A	-	-
Voltage 208-240/60/3~ + G	FLA/A	57.9/80	21.8/30
Voltage 440-480/3~ + G	FLA/A	-	11.1/20
Steam inlet (Steam model)	in	3/4"	
Water inlet	in	3/4"	
Water main pressure	Kg/cm²	2-4	
Maximum Water Consumption	Gal	88.7*	
Drain	in	3"	
Drainage capacity	Gal/min	52.8	
DIMENSIONS / PACKING DIMENSIONS			
Net width / Gross width	in	43.11 / 47.5	
Net depth / Gross depth	in	51.34 / 56	
Net height / Gross height	in	68.11 / 73	
Net weight / Gross weight	lbs	1,323 / 1,905	

* Programme No. 20, 75% load

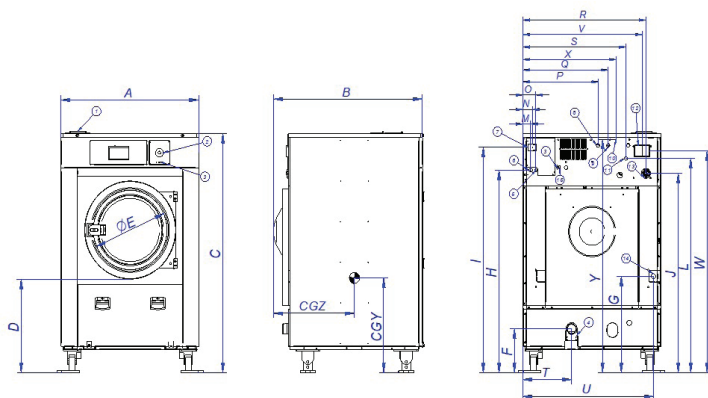

- 01. Soap dispenser
- 02. Emergency stop
- 03. USB port
- 04. Drain 1
- 05. Drain 2
- 06. Electric connection to liquid soap pumps
- 07. Electrical connection
- 08. Main switch

- 09. Auxiliar water inlet
- 10. Hot water inlet
- 11. Equipotential connection
- 12. Cold water inlet
- 13. Blur output /Water overload
- 14. Liquid soap connection
- 15. Steam connection
- 16. Air intake
- 17. Ethernet port

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	CGY	CGZ
in	43.11	51.34	68.11	20.67	22.05	6.22	22.68	52.36	58.98	52.40	59.57	55.79	2.40	2.91	3.98	23.46	26.61	38.43	31.81	15.12	40.47	37.24	58.90	29.13	61.34	31.30	31.50