



TOUCH II

- 7" touchscreen – intuitive and completely programmable
- USB Connection: software free of charge
- 37 languages, continually expanding
- Upload videos to display, use for ads, instructions, etc.



G-FORCE EXTRACTION

- 25-40 lb capacity washers: 500G
- 50-180 lb capacity washers: 450G
- 230C-275C lb capacity washers: 350G
- High G-Force speeds up drying process, reducing energy costs and increasing throughput and productivity



CONNECTIVITY

- DomusConnect, standard
- Provided at NO extra charge
- Manage your laundry operations from anywhere, 24/7
- Remote diagnosis and technical service
- Create programs, special promotions, access real-time reports, have service alerts go directly to technicians, and more



EFFICIENCY

- Low energy and water consumption
- Intelligent consumption



VERSATILITY

- Soft Mount for easy installation
- Easily converts from OPL to COIN
- Electric heating < > Hot water
- Drain valve < > Pump (Pump only available in 25lb and 30lb models)
- Wetcleaning ready
- Extraction speed and water levels easily programmed for wetcleaning, firehouse, etc.
- Machines can be customized, made to order



ERGONOMICS

- Reversible doors, standard – industry exclusive
- Industry leading large doors for easy loading and unloading
- Metal door handle, commercial grade
- Door pin guide to prevent door miss locking



MAINTENANCE

- Hinged front control panel – easy and ergonomic access
- Complete technical menu
- Common parts across all models



MORE INFO

- Stainless steel front and top panels
- 3 water inlets
- Drum and tub in stainless steel AISI 304
- Detergent dispenser with 4 compartments
- Electronic control of imbalance with frequency control (inverter driven washer with imbalance recognition)
- Loading Aid system: water and rotation control
- SGS & CE approved



OPTIONS


- Auto unlock kit for door (in case of power failure) – recommended for vended laundries
- Silicon gasket
- Relay card with 6 extra dosing signals: up to 14 signals
- 5 Extra dosing pumps
- Dosing pump kit available
- Normally closed drain valve
- Double drain kit
- Drain pump (Only 25lb and 30lb models)
- Leveling feet
- Automatic weighing sensor system on feet (Includes kit with 6 extra dosing signals).
- Various Plinths for leveling machines from top, aligning door base, etc.
- Sluice – Drum
- Tropicalized model: protected board
- Steam kit available
- Maritime (oil rigs) electric models available
- Coin/token kit

DHU-275 TOUCH II

High Spin Washer

DRUM			
Load capacity	lbs	275	
Volume	cu. ft.	40.6	
Diameter	in	53.5	
Depth	in	30.5	
GENERAL DETAILS			
Washing speed / spinning speed	r.p.m.	34 / 678	
G Factor	-	350	
Coin laundry version	-	No	
Double drain	-	Opt	
Weighing System /Tilting System	-	Opt	
DOOR			
Height center door / Height door	in	52.3 / 35.4	
Diameter	in	27.5	
POWER			
Motor Power Consumption	hp	20.12	
CONNECTIONS		Electric Heating	Hot Water/Steam
Voltage 208-240/60/1~ + G	FLA/A	-	-
Voltage 208-240/60/3~ + G	FLA/A	-	59.0/80
Voltage 440-480/3~ + G	FLA/A	-	34.1/45
Steam inlet (Steam model)	in	1-1/4"	
Water inlet	in	1-1/2"	
Water main pressure	Kg/cm²	2-4	
Maximum Water Consumption	Gal	331.2*	
Drain	in	4"	
Drainage capacity	Gal/min	132	
DIMENSIONS / PACKING DIMENSIONS			
Net width / Gross width	in	72.28 / 76.3	
Net depth / Gross depth	in	72.13 / 79.9	
Net height / Gross height	in	88.39 / 90.1	
Net weight / Gross weight	lbs	6,090 / 6,742	

* Programme No. 2, 100% load

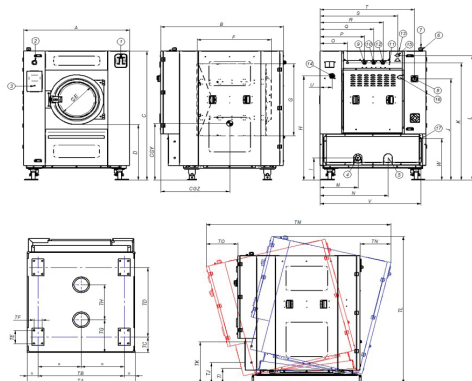

- 01. Soap dispenser
- 02. Emergency stop
- 03. USB port
- 04. Drain 1
- 05. Drain 2
- 06. Electric connection to liquid soap pump
- 07. Electrical connection
- 08. Main switch

- 09. Auxiliar water inlet
- 10. Hot water inlet
- 11. Equipotential connection
- 12. Cold water inlet
- 13. Steam output
- 14. Liquid soap connection
- 15. Steam connection
- 16. Air intake
- 17. Ethernet port

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	CGY	CGZ
in	72.28	72.13	88.39	37.20	27.56	36.61	53.15	68.50	13.23	70.12	80.84	83.07	43.11	42.99	19.45	24.96	30.47	37.56	39.13	48.78	64.80	6.50	80.67	80.71	28.23	33.58	44.49
	TA		TB	TC	TD	TE	TF	TG	TH	TI	TJ	TK	TL	TM	TN	TO											
in	69.49		63.58	7.87	52.91	7.48	4.33	14.76	38.98	10.00	12.99	26.06	97.05	105.20	16.50	16.65											