



TOUCH II

- 7" touchscreen – intuitive and completely programmable
- USB Connection: software free of charge
- 37 languages, continually expanding
- Upload videos to display, use for ads, instructions, etc.



CONNECTIVITY

- DomusConnect, standard
- Provided at NO extra charge
- Manage your laundry operations from anywhere, 24/7
- Remote diagnosis and technical service
- Create programs, special promotions, access real-time reports, have service alerts go directly to technicians, and more



OUTSTANDING FEATURES

- Reversing drum action, standard
- Stainless steel drum, standard
- Frequency inverter, standard



EFFICIENCY

- Intelligent humidity control with temperature control at drum air inlet
- Optimized, mixed airflow
- Full thermal insulation of the cabinet



VERSATILITY

- Make to order – customization
- Easily converts from OPL to COIN
- Wetcleaning configuration



ERGONOMICS

- Stainless steel mesh lint filter
- Large loading doors



MAINTENANCE

- Hinged front control panel – easy and ergonomic access
- Complete technical menu
- Common parts across all models



MORE INFO

- Grey skin plate front and side panels, stainless look, standard
- Stainless steel drum
- Soft touch hole design in dryer cylinder
- Anti-wrinkle at end of cycle
- ETL Approved



The XP dryer is a new generation in the Dynamic range. Now with 75,000 BTUs and i-Dry capable, the XP dryer is designed for easier maintenance, faster drying, and superior performance.


OPTIONS

- Integrated Fire Extinguishing System
- Dosing/spray system
- iDry - Intelligent humidity control with auto-dry capability (coin and OPL)
- Back panel external air + filter
- Lint filter with various grids
- Stainless steel front panels
- Reversible door
- Heating options, natural gas and propane
- Tropicalized model
- Coin/token kit

UDTT2-35 XP

Dynamic Stack Dryer

DRUM		
Load capacity	lbs	35 x 2
Drum diameter	in	29.53
Drum depth	in	29.37
Drum volume	cu. ft.	11.64
Door opening diameter	in	22.63
Height from floor to bottom of door	in	7.32 / 45.83
Drum motor power	hp	0.5 x 2
GAS POWER		
Installed heating power gas	BTU/h	75,067 x 2
Evaporation capacity	Gal/h	4.22 x 2
Gas inlet	in	3/4"
VENTILATION		
Normal air flow	cfm	294 x 2
Vent size	in	8"
Fan motor power	hp	0.34 x 2
CONNECTIONS		
Voltage 110-120/60/1~ +G	FLA/A	10.7/15
DIMENSIONS / PACKING DIMENSIONS		
Net width / Gross width	in	30.91 / 34
Net depth / Gross depth	in	50.04 / 53.5
Net height / Gross height	in	78.50 / 83
Net weight / Gross weight	lbs	692 / 739

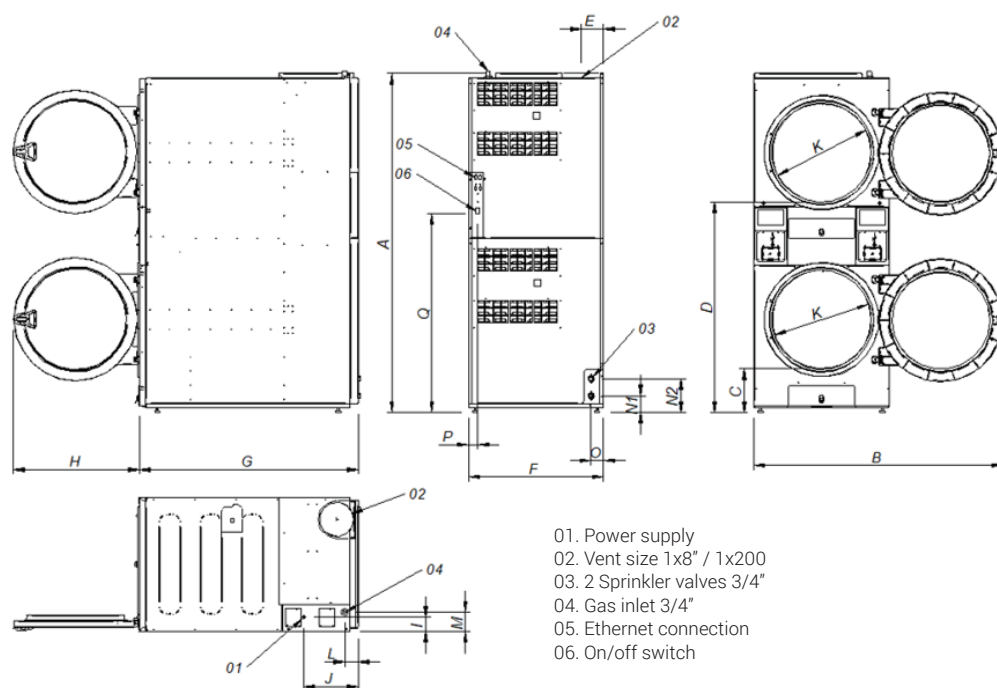

	A	B	C	D	E	F	G	H	I	J	K	L	M	N1	N2	O	P	Q
in	78.50	56.97	10.20	48.58	5.16	30.91	50.04	28.94	3.27	12.52	22.64	3.03	4.45	3.82	7.76	2.87	2.13	45.79