



TOUCH II

- 7" touchscreen – intuitive and completely programmable
- USB Connection: software free of charge
- 37 languages, continually expanding
- Upload videos to display, use for ads, instructions, etc.



CONNECTIVITY

- DomusConnect, standard
- Provided at NO extra charge
- Manage your laundry operations from anywhere, 24/7
- Remote diagnosis and technical service
- Create programs, special promotions, access real-time reports, have service alerts go directly to technicians, and more



OUTSTANDING FEATURES

- Reversing drum action, standard
- Stainless steel drum, standard
- Frequency inverter, standard



EFFICIENCY

- Intelligent humidity control with temperature control at drum air inlet
- Optimized, mixed airflow
- Full thermal insulation of the cabinet



VERSATILITY

- Make to order – customization
- Easily converts from OPL to COIN
- Wetcleaning configuration



ERGONOMICS

- Stainless steel mesh lint filter
- Large loading doors



MAINTENANCE

- Hinged front control panel – easy and ergonomic access
- Complete technical menu
- Common parts across all models



MORE INFO


- Grey skin plate front and side panels, stainless look, standard
- Stainless steel drum
- Soft touch hole design in dryer cylinder
- Anti-wrinkle at end of cycle
- ETL Approved



OPTIONS

- Integrated Fire Extinguishing System
- Dosing/spray system
- iDry - Intelligent humidity control with auto-dry capability (coin and OPL)
- Back panel external air + filter
- Lint filter with various grids
- Stainless steel front panels
- Reversible door
- Heating options, natural gas and propane
- Tropicalized model
- Coin/token kit

DRUM		
Load capacity	lbs	50 x 2
Drum diameter	in	32.87
Drum depth	in	31.50
Drum volume	cu. ft.	15.54
Door opening diameter	in	22.63
Height from floor to bottom of door	in	8.46 / 49.53
Drum motor power	hp	0.49 x 2
GAS POWER		
Installed heating power gas	BTU/h	98,952 x 2
Evaporation capacity	Gal/h	11.624 x 2
Gas inlet	in	3/4"
VENTILATION		
Normal air flow	cfm	530 x 2
Vent size	in	10"
Fan motor power	hp	0.74 x 2
CONNECTIONS		
Voltage 110-120/60/1~ +G	FLA/A	20.9/30
DIMENSIONS / PACKING DIMENSIONS		
Net width / Gross width	in	34.25 / 37
Net depth / Gross depth	in	51.65 / 55
Net height / Gross height	in	83.39 / 89
Net weight / Gross weight	lbs	824 / 863

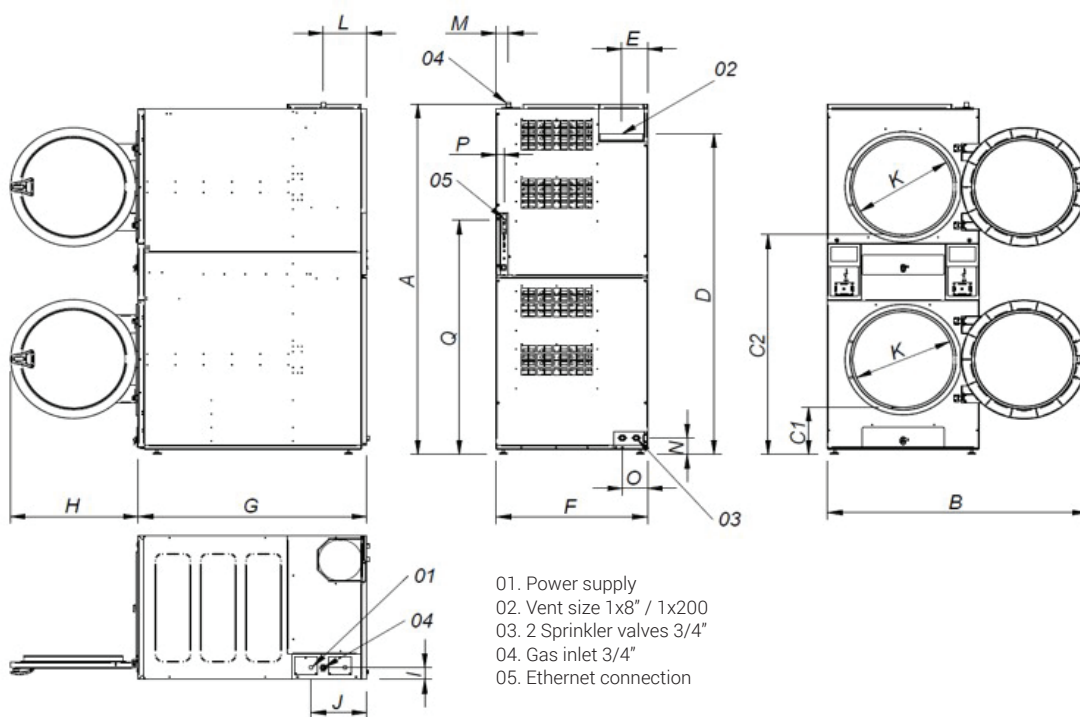

	A	B	C1	C2	D	E	F	G	H	I	J	K	L	M	N	O	P	Q
in	83.39	58.66	11.26	52.36	76.38	5.87	34.25	51.65	28.94	2.87	12.60	22.64	9.84	2.76	3.94	5.71	1.77	55.75